

INSTALLATION GUIDE

B5802EXPD18 & B5805EXPD18

CARGO BARRIER


2018+

FORD EXPEDITION


Pro-gardTM
PRODUCTS LLC.

STRONG. RELIABLE. SECURE.

THESE COMPONENTS ARE REQUIRED
TO INSTALL THE CARGO BARRIER

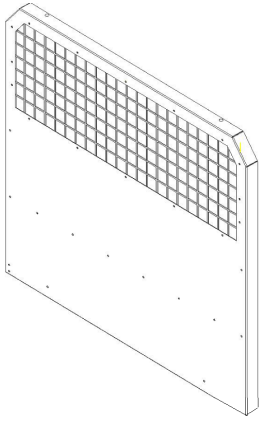

3B300X BARRIER



Part #4B58EXPD18 HARDWARE/WING KIT

I. The following tools will be required to complete the installation

- A. Ratchet with 7/16" Socket
- B. #2 Phillips Screwdriver

II. Read all instructions and refer to last page to ensure all parts were received

YCTPIPI < *Locate All wiring, fuel lines, brake lines, coolant lines, or refrigerant lines before drilling any holes or installing any self-drilling fasteners.*

III. Barrier Installation

- A. Install the upper mounting brackets (3B5818-02D driver's side, and 3B5818-02P passenger side) finger tight to the top of the barrier using a (3X36) carriage bolt and (3X16Z) whiz nut on each side. The deep bend on the brackets should face away from the barrier and project in the downward direction (see Fig. 1).
- B. Remove the OEM coat hook assemblies from the headliner area near the rear hatch.
- C. Place the barrier in place behind the rear seats. With the second row seats folded down, raise the barrier up and align the rear of the upper support brackets with the holes from the OEM coat hooks. Insert the (4S5070P7) spacer between the bracket and coat hook hole, pass the (3X262) bolt through the bracket and spacer, and loosely thread it into the coat hook hole (do this for both sides).

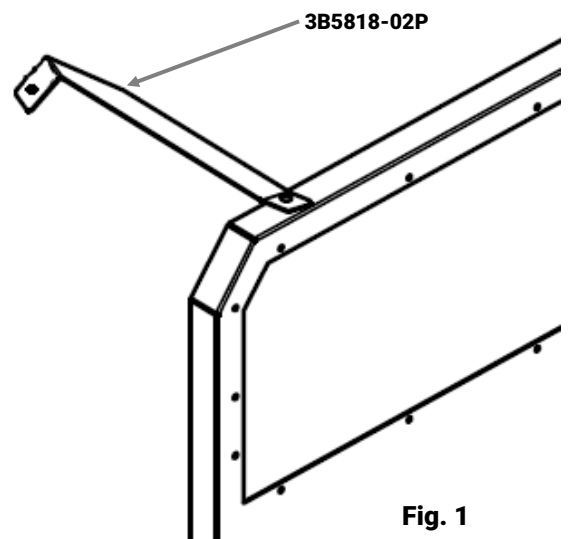


Fig. 1

- D. Loosen the rear seat bolts at the base of the 2nd row seats and insert the forked end of the (3B5818-01) lower barrier brackets. Align the holes in the rear of the brackets with each side of the barrier, and fasten with two (3X36) carriage bolts and two (3X-16Z) whiz nuts at each end (See Fig 2).

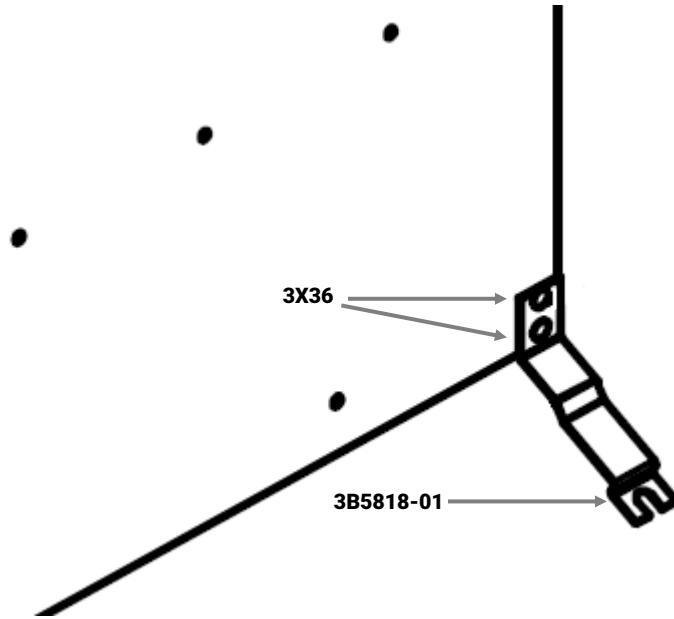


Fig. 2
(Driver's Side Shown)

IV. Install Wings

- A. Attach the polycarbonate top panel (3BW5818-05) to the barrier using the existing bolts from the top of the barrier window frame. Hand tighten fasteners.
- B. Attach polycarbonate lower wings (3BW5818-03 and 3BW5818-04) to each side using two (3X36) carriage boots and two (3X16Z) whiz nuts on each. Hand tighten fasteners.
- C. Attach polycarbonate upper wings (3BW5818-01 and 3BW5818-02) to each side using existing barrier window hardware. Hand tighten fasteners.
- D. Position the barrier in the center of the vehicle. Adjust the polycarbonate wings for desired fit against the interior trim and headliner. Tighten all fasteners.
- E. Installation is now complete.

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	3B300X-D_REV F	BARRIER, EXPEDITION
2	2	3B5818-01	BRACKET, LOWER BARRIER EXPEDITION
3	1	3B5818-02D	BRACKET, UPPER BARRIER EXPD D5
4	1	3B5818-02P	BRACKET, UPPER BARRIER EXPD PS
5	2	4G5070P7	SPACER, PLASTIC, 1-1/8" LONG
5	10	3X36	1/4-20 X 5/8 CARRIAGE BOLT
7	10	3X16Z	1/4-20 LARGE HEX WHIZ NUT-ZINC
8	2	3X262	# 10 x 2" FLANGE HEAD SHEET SCREW
9	2	3X215	# 10 WASHER FLAT SAE ZINC
10	1	4BW5818-01	BARRIER WING EXPD 18 AB LEFT UPPER
11	1	4BW5818-02	BARRIER WING EXPD 18 AB RIGHT UPPER
12	1	4BW5818-03	BARRIER WING EXPD 18 AB RIGHT LOWER
13	1	4BW5818-04	BARRIER WING EXPD 18 AB LEFT LOWER
14	1	4BW5818-05	BARRIER WING EXPD 18 AB TOP WING
15	1	3A5001	CARGO WIRE WINDOW, FULL SIZE

