


# **INSTALLATION GUIDE**

**2018-2020 DODGE DURANGO SSV  
2019-2020 DODGE DURANGO PURSUIT  
PB67D18HD PUSH BUMPER**

**Pro-gard**<sup>TM</sup>  
PRODUCTS LLC.

**STRONG. RELIABLE. SECURE.**

**THESE COMPONENTS ARE REQUIRED  
TO INSTALL THE PUSH BUMPER**

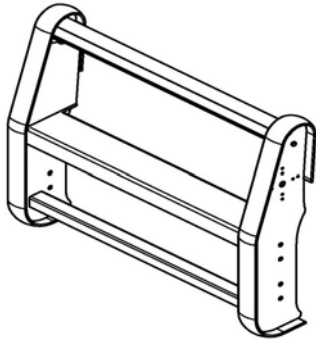

Part #4PBDHD  
HD SUV BUMPER



Part #4OSBK6718

**I. Refer to the diagram above and on last page to verify all parts were received.**

**II. The following tools will be required to complete the installation:**

7/16" Socket W/ driver	7/16" Open end wrench	13mm Socket
13mm Open end wrench	3/4" Socket	3/4" Open end wrench
10mm Socket	5.5mm Socket	8mm Socket

**III. Read all instructions carefully before starting the assembly process.**

**Note:** *Locate all wiring, fuel lines, brake lines, and /or cooling lines before drilling holes or installing any fasteners.*

**IV. Front Fascia Removal**

- A. Using Trim Stick C-4755 or equivalent, carefully release the seven clips (2) attaching the flare (1) to the fender and remove the flare. (Fig. 1)
- B. Remove the fasteners (3) that secure the wheel liners to the fascia. (Fig. 1)
- C. Remove the four lower retainers (4). (Fig. 2)
  - Release the integral latches at the wheel well openings (2) and the radiator grille assembly.
  - Disconnect the fog lamp electrical connectors (3), if equipped.
- D. Carefully remove the fascia from the vehicle, remove/disconnect any wiring.

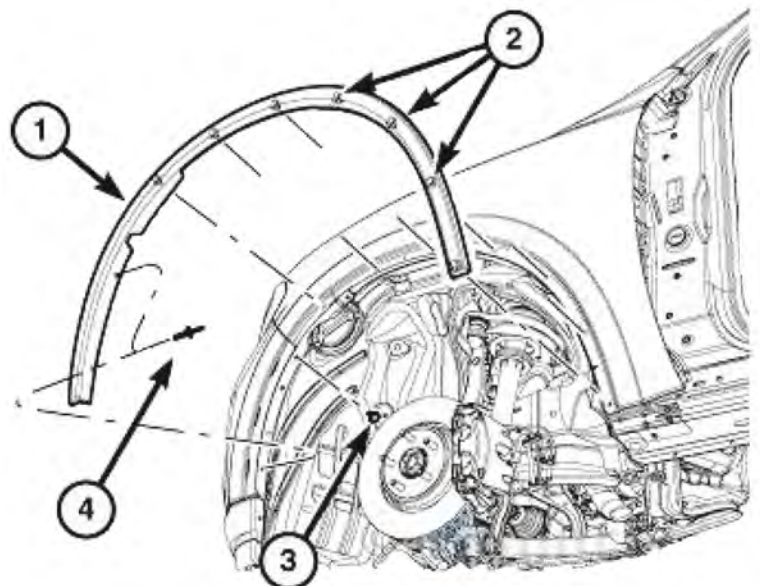


FIG. 1

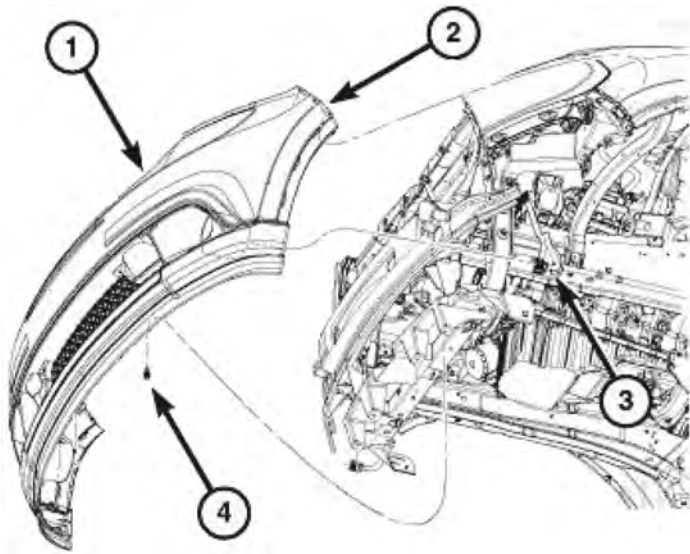


FIG. 2


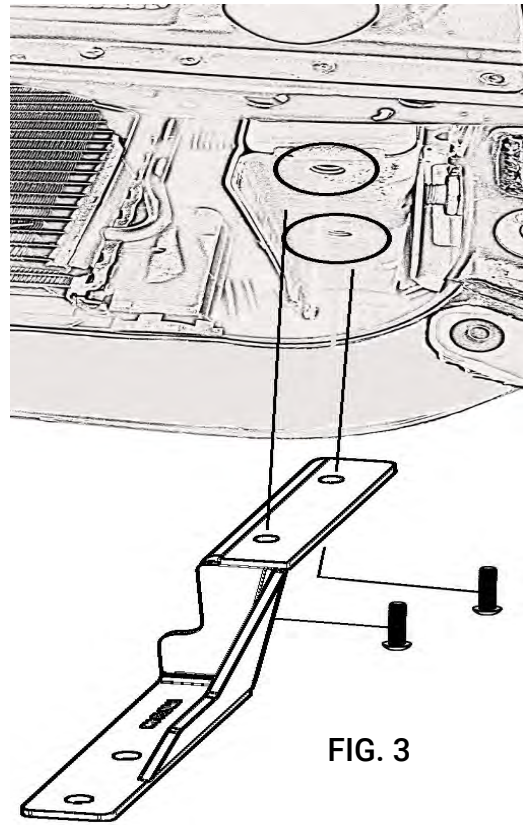


FIG. 3

## V. Push Bumper Bracket Installation

- A. On underside of vehicle, align holes of lower mounting bracket (3PB6718-07D) and fasten using 3X445 bolts. (Fig 3, driver side shown)
- B. Repeat for opposite side.
- C. Install upper mounting brackets by removing OEM bolts on the front bumper beam and re-use to fasten bracket (3PB6718-08P). (Fig. 4, passenger side shown)
- D. Repeat for opposite side.
- E. Cut and remove lower grille trim from both ends so the lower mounting brackets are able to protrude through. (see pg. 6 and 7)
- F. Re-Install the front fascia to the front of the vehicle ensuring that the upper and lower mounting points protrude from the vehicle. (Fig. 8)
- G. For passenger side of vehicle Install outer upper (3PB6718-11) and lower (3PB6718-12) mounting brackets to passenger side using bolt (3X603) and nut (3x601). Leave loose for adjustment. (see pg. 5 for orientations)
- H. Repeat for the driver side using brackets (3PB6718-11 and 3PB6718-12).  
On the drivers side (3PB6718-11) is used in the lower location and (3PB6718-12) is used in the upper location.

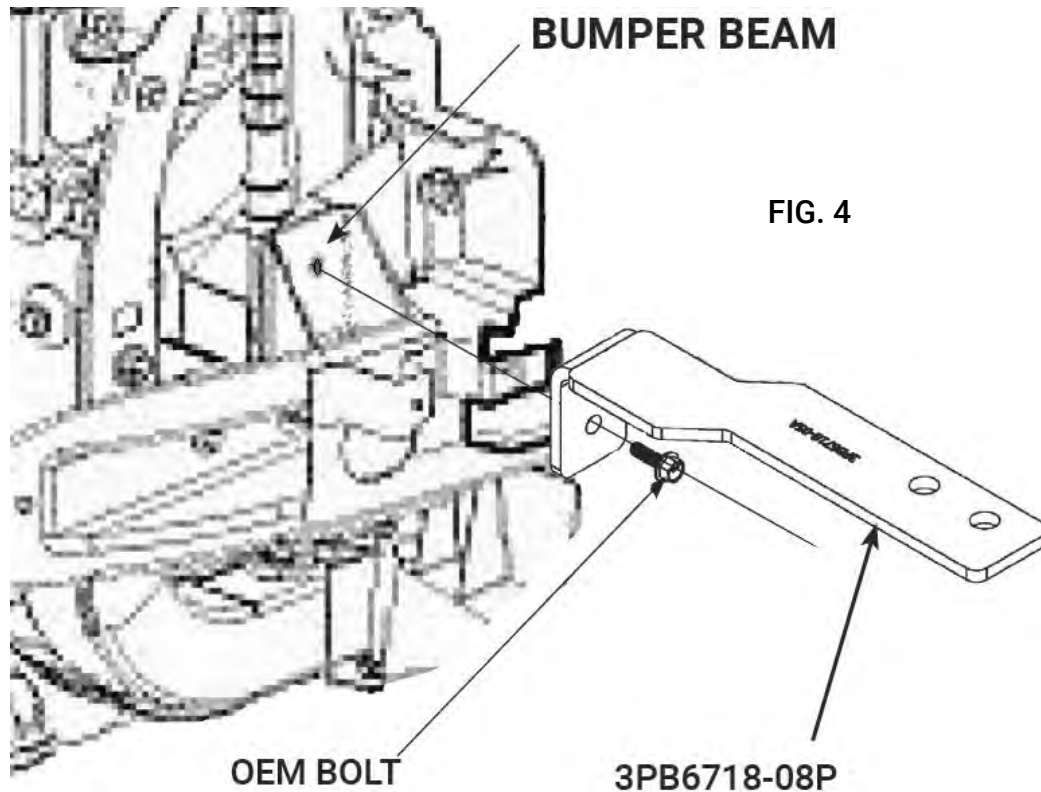



## VI. Push Bumper Installation

- A. Lift the push bumper (4PBDHD) into place aligning the two upper holes of the push bumper with the holes located in brackets. Secure the brackets to the push bumper with the provided 3/8-16 bolts (3X603), serrated flange lock nuts (3X601). (Fig 10)
- B. Align push bumper with lower brackets and secure using the provided 3/8-16 bolts and serrated lock nuts. (Fig. 10)
- C. After adjusting push bumper, tighten all fasteners and ensure that push bumper is properly secured.

## VII. Installation Complete




PARTS LIST

ITEM	QTY	PART NUMBER	REVISION NUMBER	DESCRIPTION
1	4	3X445	A	M10-1.5 X 25 SERRATED FLANGE HEAD CAP SCREW
2	1	3PB6718-07D	A	DURANGO PUSH BUMPER BRACKET, DS
3	1	3PB6718-08D	A	DURANGO PUSH BUMPER BRACKET, DS
4	2	3PB6718-11	A	DURANGO PUSH BUMPER BRACKET
5	2	3PB6718-12	A	DURANGO PUSH BUMPER BRACKET
6	1	3PB6718-08P	A	DURANGO PUSH BUMPER BRACKET, PS
7	1	3PB6718-07P	A	DURANGO PUSH BUMPER BRACKET, PS
8	16	3X601	A	3/8-16 SERRATED FLANGE HEX NUT, BLACK ZINC
9	16	3X603	A	3/8-16 X 0.875" HEX HEAD BOLT, BLACK ZINC

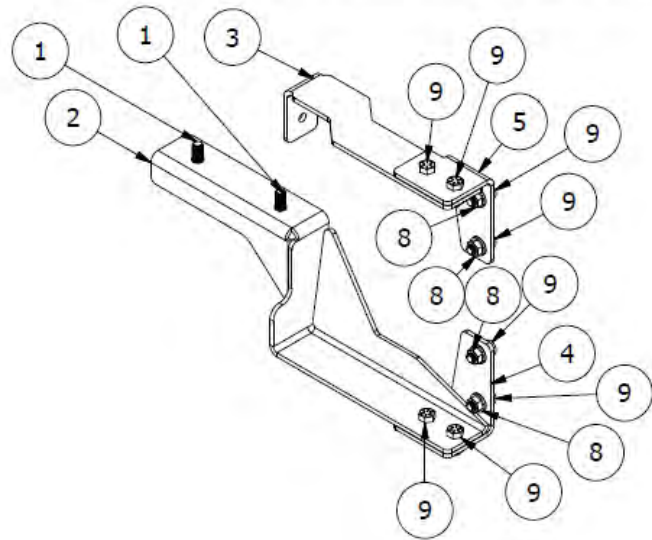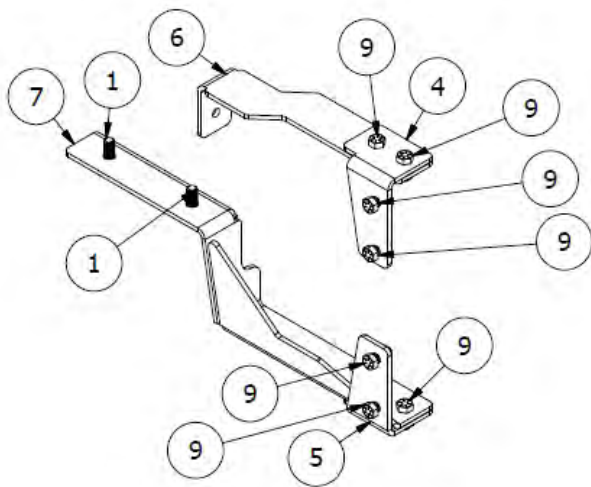

# Durango SSV

## Trim Locations

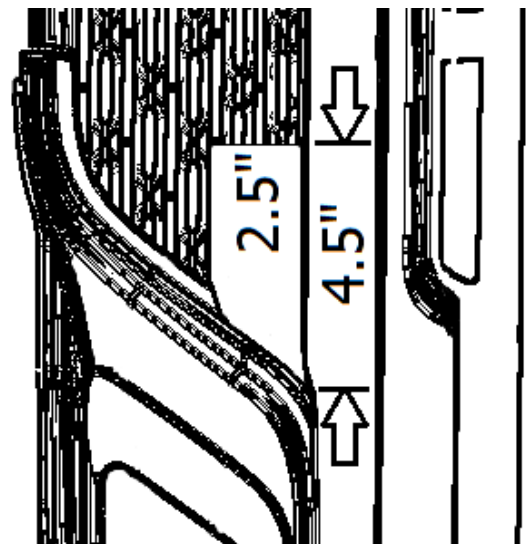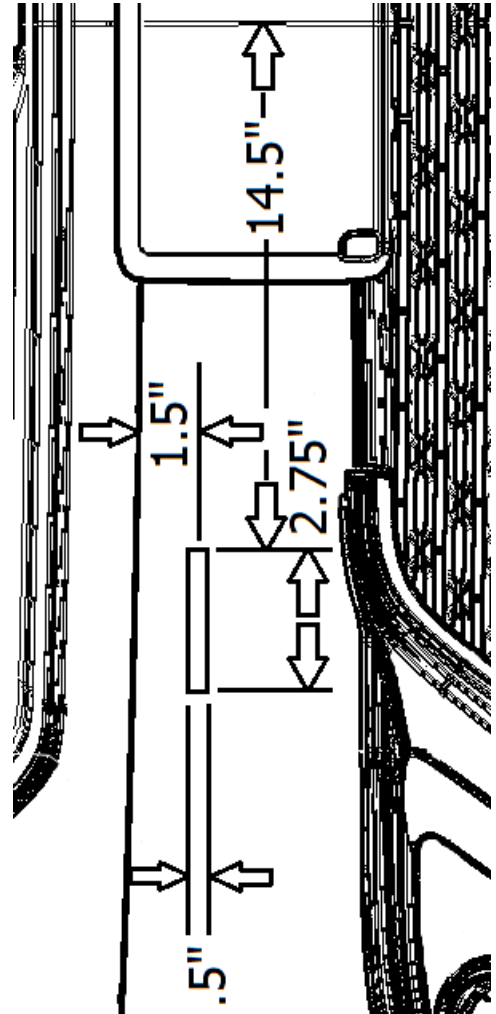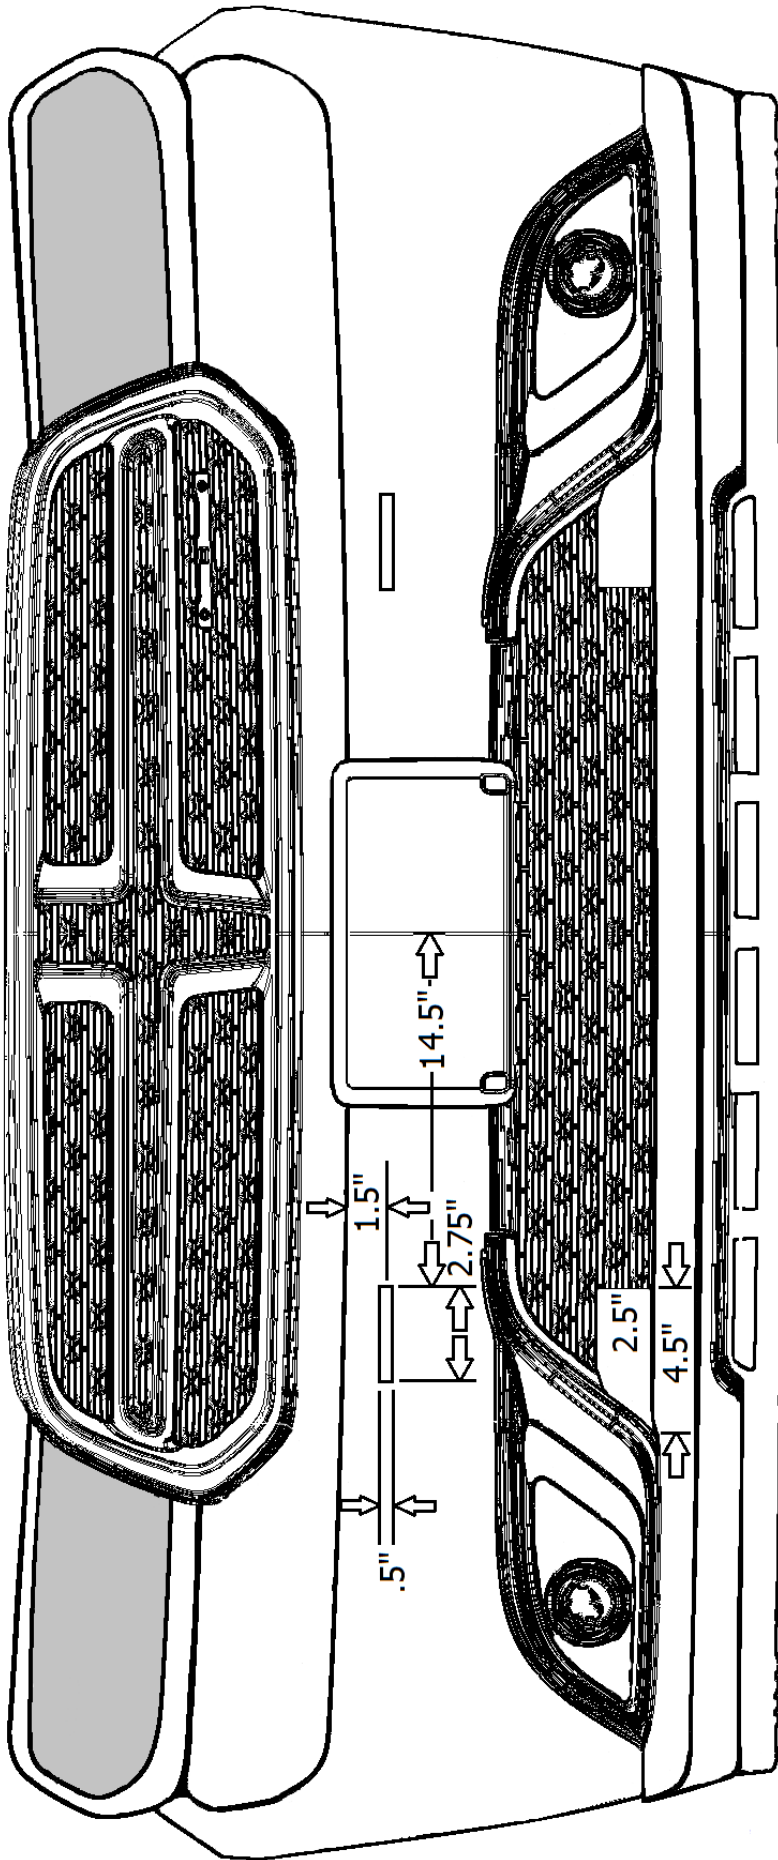

# Durango PPV

## Trim Locations

