


INSTALLATION GUIDE
ABS TRANSPORT SEAT ABS
FLOOR PAN
2013 - 2019 FORD POLICE
INTERCEPTOR UTILITY

Pro-gard[™]
PRODUCTS LLC.

STRONG | RELIABLE | SECURE

pro-gard.com
800.480.6680

THESE COMPONENTS ARE REQUIRED
TO INSTALL THE PRO-GARD PARTITION SYSTEM

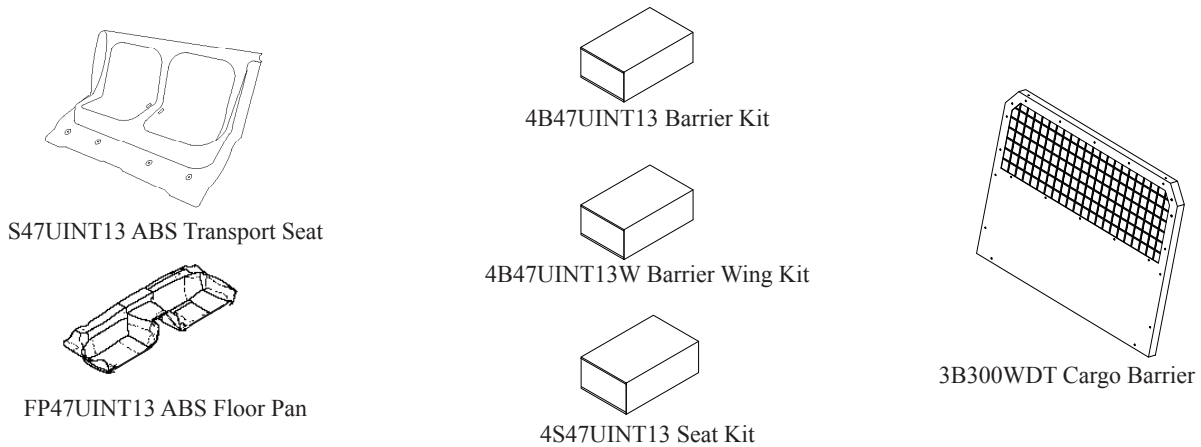

- I. Refer to the diagram on the last page of these instructions to verify all parts were received.
- II. The following tools will be required to complete the installation.
 - A. 1/4" drive ratchet with 7/16" socket
 - B. 3/8" drive ratchet and 6" extension with 18mm and 19mm sockets
 - C. Drill with 5/16" diameter bit

- III. Read all instructions carefully before starting the assembly process.

NOTE: *Locate all Wiring, Fuel lines, Brake lines, Coolant lines and Refrigerant lines before drilling holes or installing self-drilling fasteners.*

- V. Remove OEM Rear Seat

- A. Locate the four OEM seat rear mounting bolts, they are located at the rear of the OEM rear seat under the Load Floor Access Panel. Using a 18mm socket wrench remove the nuts from the OEM studs. Next, remove the four OEM nuts and the four OEM bolts secure the front of the OEM rear seat to the vehicle.

- B. Remove the two center OEM seat belt buckles from the OEM seat (See Fig. 1)

- C. Once the OEM seat is removed there are two foam blocks that must be removed/cut from the vehicle. There is also a piece of foam between these two foam blocks at the center. This foam must be removed for the seat to fit into the vehicle.

NOTE: This step must be performed to allow the ABS transport seat to fit properly during installation!

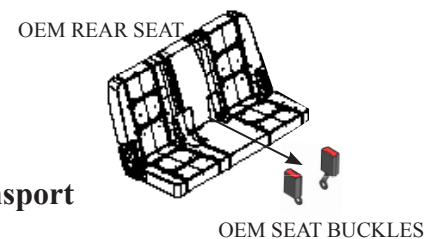


Fig. 1

VI. Cargo Barrier Installation.

- A. The Cargo Barrier (3B300), Barrier Mounting Hardware (4B47UINT13), and Barrier Filler Wings (4W47UINT13A) are marked and packed in separate boxes. Install the Cargo Barrier components according to their included Install Instructions.


VII. ABS Transport Seat Mounting Rail Installation

- A. Remove the lower four bolts and nuts securing the window into the cargo barrier. Retain them for the next step.
- B. Orient the Seat Upper Mounting Rail (3S4713-31) so the long flange with the weld nuts is pointed towards the headliner. Place the Rail onto the Cargo Barrier and align it with the lower holes in the Barrier. Fasten the Rail using the bolts and nuts previously removed from the Barrier. (See Fig. 2)

VIII. Seat Belt Extension Bracket Installation.

- A. Remove the nuts from the studs securing the brace from the OEM rear frame support to the seat mounting plate. Retain the studs for use in the next step.
- B. Orient the Seat Belt Extension Bracket (3S4711-30) so the offset faces the front of the vehicle. Place The Bracket over the studs in the OEM Brace and secure using the nuts removed previously (See Fig. 3)

Fig. 2




IX. Floor Pan Installation

If no ABS Floor Pan is being installed skip to Section X.

- A. Place the ABS Floor Pan in the vehicle, making sure that there are no objects underneath of it. Insure that the Floor Pan is all the way back and down against the rear seat area.

Note: *The Floor Pan goes under the B-pillar trim and flush against the rear scuff trim.*

Fig. 3

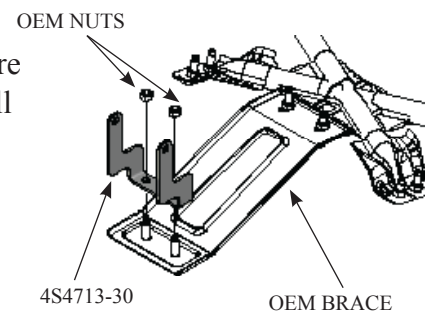

X. ABS Transport Seat Installation.

- A. The front portion (flap) of the load floor must be flipped up out of the way to allow the transport seat to be fully installed into the vehicle. It may help to tape this flap up out of the way as it is difficult to hold the flap up during transport seat installation.
- B. Place the ABS Seat into the vehicle. Tip the seat to the rear, pull the shoulder belts out of the way and slide the seat back and up until the four holes along the front lip of the seat begin to align with the four OEM seat mounting studs in the floor. Take extra care when aligning the Seat Belt Extension Bracket with the Slots in the ABS Seat. Push the seat back and down seat rests against the Seat Mounting Rail.

Note: *The ABS Transport Seat sits on top of the ABS Floor Pan and the OEM rear scuff trim.*

- C. Start the five Phillips head screws (3X05) with washers (3X12) along the top of the seat into the Seat Mounting Rail. It may be necessary to enlarge the holes in the Transport Seat to insure proper thread stating.
- D. Push the front lip of the seat down over the mounting studs and start the four acorn nuts (3X222).
- E. Check the overall fit and alignment of the seat. Tighten all seat fasteners.

Note: *If the vehicle has the OEM wire raceway option, it will need to be uninstalled or the ABS Transport Seat will need to be trimmed to fit.*

XI. Seat Belt Buckle Installation.

- A. Place the Rubber Seat Belt Grommets (S6001F) over the Seat Belt Extensions and into the slots on the ABS Transport Seat.
- B. Using the Supplied 1/2-13 x 1" (3X221) Low Head Bolts and 1/2-13 Flange Nuts (3X220) Attach the OEM seat belt buckles to the Seat Belt Extension Bracket (See Fig. 4)

XII. Audit the overall installation for fit and function of all componets, insure all fasteners are tight.

XIII. Installation is now complete.

