


INSTALLATION GUIDE

**2021 - CURRENT
FORD F150 SUPER CREW
POLY WINDOW ARMOR WITH ABS DOOR PANEL
WBP81FT21 / DP81FT21**

Pro-gard[™]
PRODUCTS LLC.

STRONG. RELIABLE. SECURE.

**THESE COMPONENTS ARE REQUIRED
TO INSTALL THE REAR WINDOW ARMOR WITH DOOR PANEL**

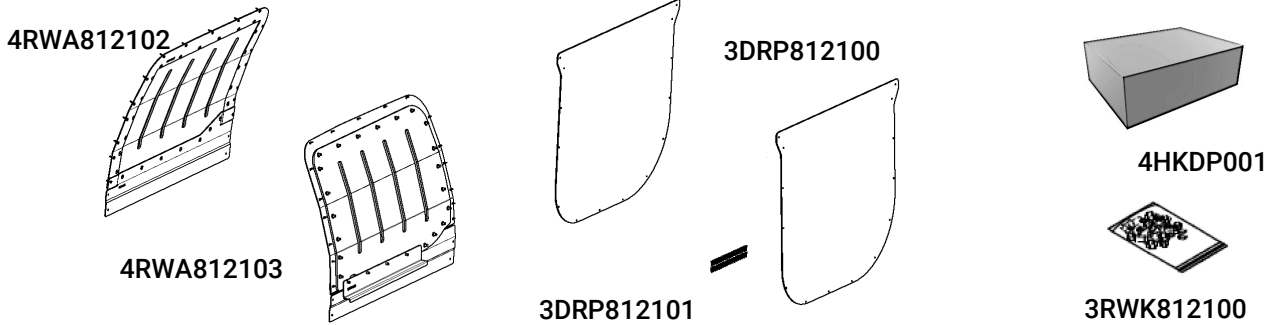

I. The following tools will be required to complete the installation

- A. #2 Phillips driver B. 7/64" Drill bit C. 8mm Socket

II. Read all instructions and refer to the last page to ensure all parts were received

WARNING: *Locate all wiring, fuel lines, brake lines, coolant lines, and refrigerant lines before drilling any holes or installing any self-drilling fasteners.*

III. OEM Door Panel Removal

- A. Open passenger and driver rear doors and roll down both windows.
- B. Choose a side and remove the OEM door panel. (Fig. 1)
- C. Remove the speaker from the door. Remove OEM panel mounting blocks.
- D. Secure wiring harnesses and associated plugs by tape, cable tie and insert into door shell where possible.
- E. Remove power window switch from door panel and re-connect it to vehicle wiring harness. Protect it from moisture and secure inside the door frame away from window travel.
- F. Secure door latch cable to prevent rattle.
- G. Repeat for the opposite side.

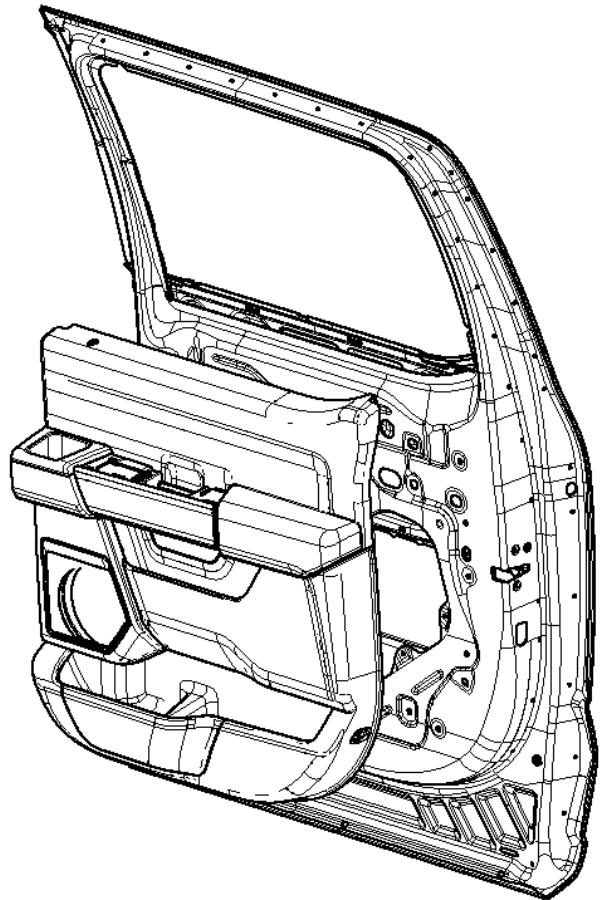


Fig. 1

IV. Window Armor and Door Panel Installation

- A. Insert window armor into window opening, press firmly on the center of the lower section while sliding down into place to insure armor locks into window frame.
- B. Slide ABS door panel under bottom lip of window armor and align top 2 holes in panel with bottom 2 holes in window armor.

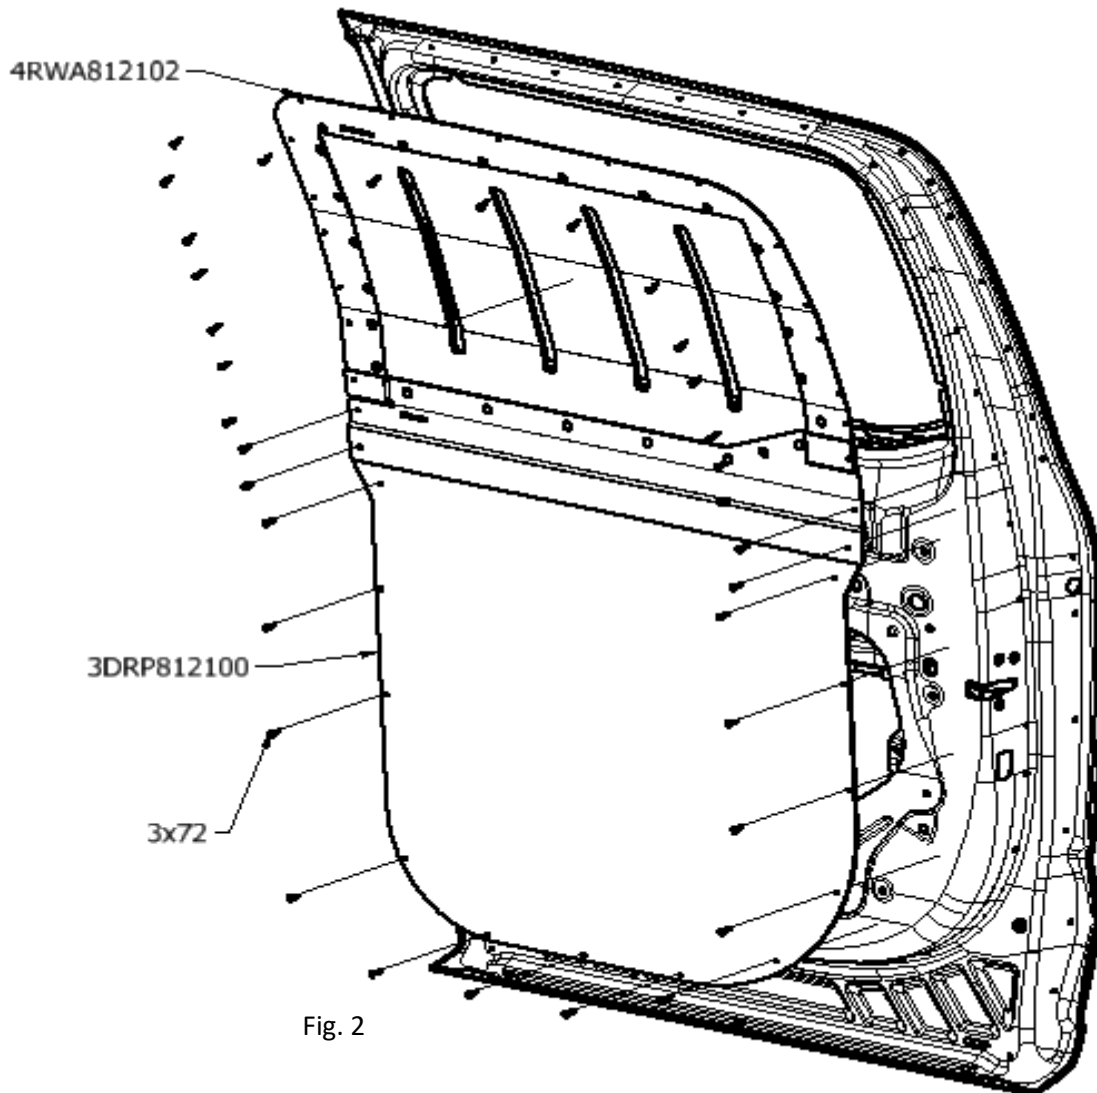


Fig. 2

- C. Ensure window armor is aligned with top of window frame but does not protrude above this.
- D. Once fitted satisfactorily, drive (2) self-tapping screws [3X72] into the lower 2 holes of the window armor securing both the panel and the armor (Fig. 2) If necessary, drill a 7/64" pilot hole.
- E. Drive (19) more screws [3X72] through the armor into the door. If necessary, drill a 7/64" pilot hole.
- F. Drive the remaining (12) screws [3X72] into the door panel and door. If necessary, drill a 7/64" pilot hole.
- G. Repeat for the opposite side.

Installation complete

If you have any problems with this installation or have any questions please call (800-480-6680) and ask for technical assistance.

PARTS LIST		
ITEM QTY	PART NUMBER	DESCRIPTION
1	1	4RWA812102 POLY WINDOW ARMOR PASS. ABS
2	1	4RWA812103 POLY WINDOW ARMOR DRIVER ABS
3	1	3DRP812100 ABS DOOR PANEL, F-150 PS
4	1	3DRP812101 ABS DOOR PANEL, F-150 DRIVER
5	1	4HKDP001 DOOR PANEL KIT
6	1	3RWK812100 F150 WINDOW ARMOR HARDWARE

