INSTALLATION GUIDE

2020 - CURRENT FORD POLICE INTERCEPTOR UTILITY SELF SUPPORTING GUNRACK BASE 4GRK472000



STRONG. RELIABLE. SECURE.

THESE COMPONENTS ARE REQUIRED TO INSTALL THE SELF SUPPORTING GUNRACK BASE



- I. The following tools will be required to complete the installation
 - A. 5/32" Hex drive
- B. 13mm Socket
- II. Read all instructions and refer to the Parts List to ensure all parts were received.

WARNING: Locate all wiring, fuel lines, brake lines, coolant lines, and refrigerant lines before drilling any holes or installing any self-drilling fasteners.

III. Assemble the Base

- A. Locate the Driver Side Leg [3GRK472005] and (4) Button Head screws [3X258].
- B. Align the Driver Side Leg with the corresponding holes on the driver side of the base and start all (4) screws by hand (Fig. 1).
- C. Using a 5/32" Hex drive tighten the (4) screws installed in step B.
- D. Repeat steps A C on the passenger side of the base using the Passenger Side Leg [3GRK472006] and the remaining (4) Button Head screws [3X258].


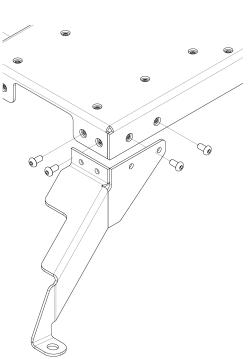


Figure 1

IV. Install the Base

- A. Using a 13mm socket remove the rear inboard bolts from the front driver and passenger seats.
- B. Continuing with the 13mm socket remove the (2) most inboard bolts attaching the rear seat structure to the vehicle (Fig. 2).
- C. Place the gunrack base into the vehicle setting the front legs on top of the seat rails. Make sure there are no wires between the base and the rear seat structure. Align the four large holes in the gunrack base with the corresponding holes for the bolts removed from the vehicle in steps A and B.
- D. Loosely start each of the (4) OEM bolts removed in steps A and B back into their respective holes then torque to OEM specification.

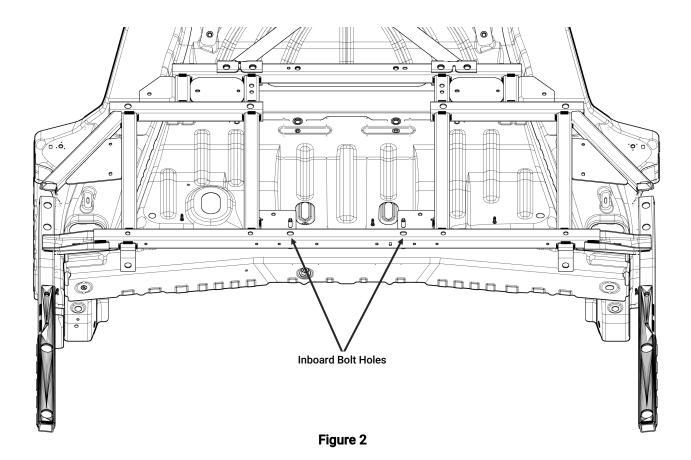

Installation complete

If you have any problems with this installation or have any questions please call (800-480-6680) and ask for technical assistance.

