




INSTALLATION GUIDE

***2018 - CURRENT
DODGE RAM
REAR WINDOW GUARD
RWG59RAM18***

**THESE COMPONENTS ARE REQUIRED
TO INSTALL THE REAR WINDOW GUARD**

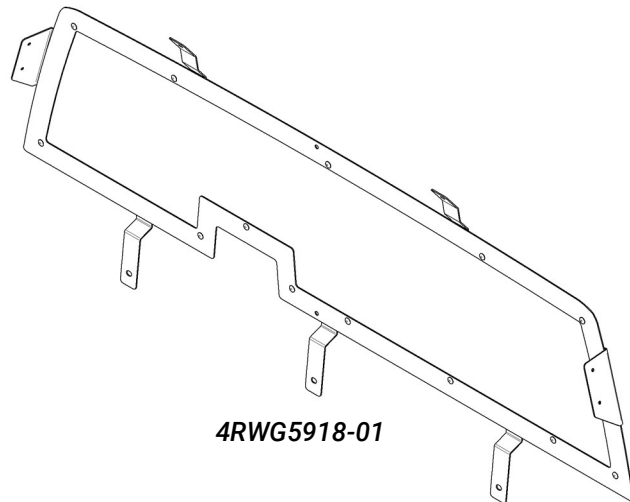

**HARDWARE KIT
4RWGHK5918**

- I. The following tools will be required to complete the installation**
- II. Read all instructions and refer to the second to last page to ensure all parts were received**
- | | |
|--------------------|-----------------------|
| A. 3/8" socket | D. 3/16" drill bit |
| B. T30 torx driver | E. Trim removal tools |
| C. 13mm socket | |

WARNING: Locate all wiring, fuel lines, brake lines, coolant lines, and refrigerant lines before drilling any holes or installing any self-drilling fasteners.

III. Preparation

- A. Remove rear seat. (Fig. 1)
- B. Remove lower (3) 13mm OEM bolts, child seat tethers, and upper (2) 6mm bolts using T30 torx , coat hooks at headliner.
- C. Remove upper C-pillar trim by prying with trim tool.



REMOVE TRIM BOTH SIDES

REMOVE OEM BOLTS

Figure 1

IV. Install Mounting Brackets

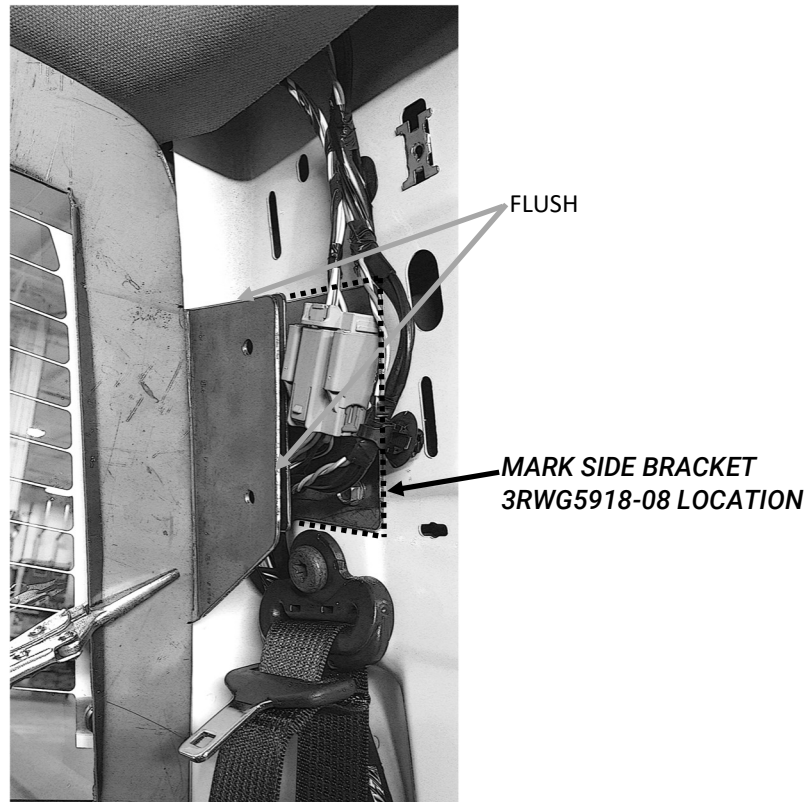


Figure 2

- A. Use frame to locate the side brackets [3RWG5918-08] by temporarily fastening frame assembly [4RWG5918-01] to the upper and lower locations using the OEM fasteners you removed in a previous step.
- B. Slide C-pillar mounting bracket [3RWG5918-08] behind harness and align with frame mounting tab making top and front edges flush (Fig. 2).
- C. Mark side bracket location or, if accessible, drive in (2) [3X162] self-tapping screws into sheet metal body using 3/8" socket. Holes can be drilled with a 3/16" bit if necessary. (Fig. 3).
- D. Re-install the C-pillar trim

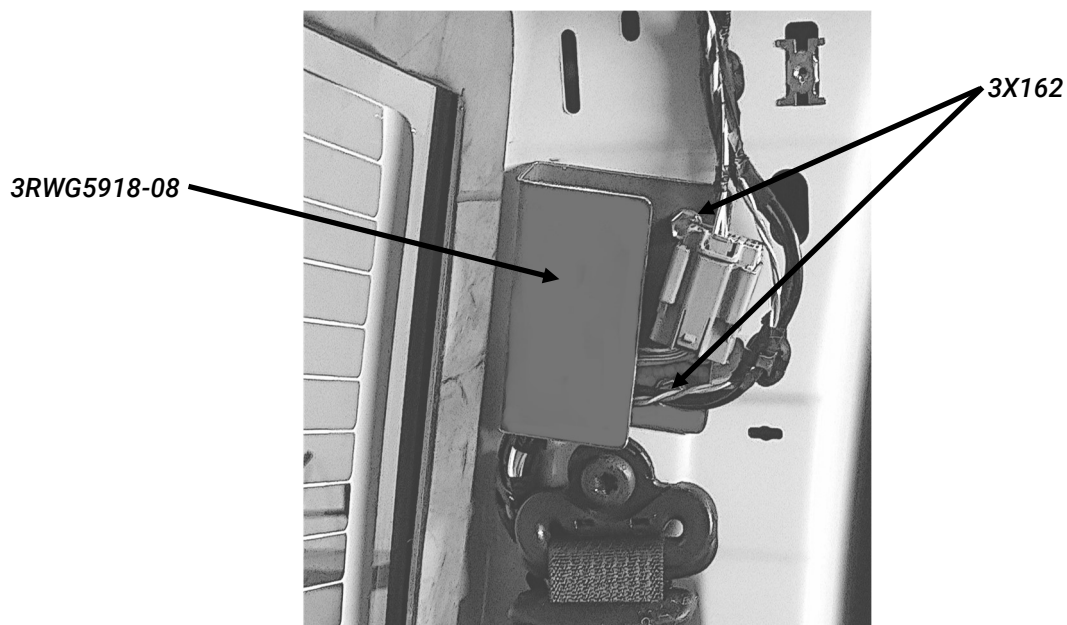


Figure 3

V. Install Frame

- A. Re-install frame assembly [4RWG5918-01] using OEM fasteners. (Fig. 4)
- B. Drive (2) self drilling screws [3X162] thru C-pillar trim into side bracket underneath and repeat for opposite side. (Fig. 4)

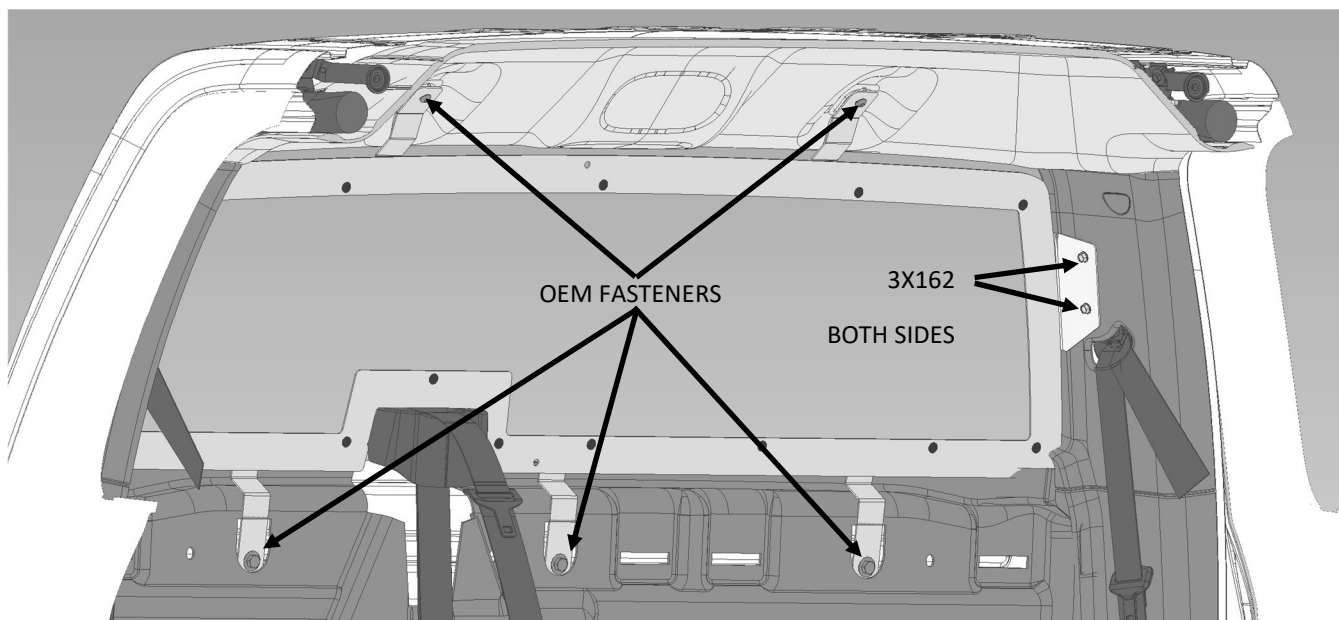


Figure 4

VI. Finishing Steps

- A. Ensure all fasteners are tight and secure.
- B. Re-install rear seat.

Installation complete

If you have any problems with this installation or have any questions please call (800-480-6680) and ask for technical assistance.

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	3RWG5918-08	C-PILLAR BRACKET
2	8	3X162	#14 x 3/4" SELF DRILLING HEX HEAD SCREW
3	1	4RWG5918-01	REAR WINDOW FRAME RAM 18

